



Intelligent Device System

The intuitive design and user-friendly set-up of the HA300 Electrosurgical Generator (diathermy) for us in the modern operating room, it features both Monopolar and Bipolar functions to satisfy all the surgeries demands with safety, flexibility, reliability and convenience.

PEM(Return Electrode Monitoring)

The PEM system continually monitors patient impedance levels and deactivates the generator if a fault in the patient/return electrode contact is detected , which minimizes the danger of burning incidents.




Memory Records Features

Memory program that allows customize settings for different interventions and surgeons. Now total from 0~30 memories locations can be available for user-defined settings, which make Orion a versatile, indispensable companion in HF surgery.

Real-time Monitoring and Instance Response System for Tissue Density

This proprietary technology delivers optimal clinical effects through continuous synchronization of current and voltage. It samples the current and voltage 450,000 times per second which enables it to respond to tissue impedance changes in less than 10 milliseconds, which ensuring the machine achieves optimum energy output levels quicker and more accurately – ensuring that only the precise voltage needed is safely delivered to each tissue type.

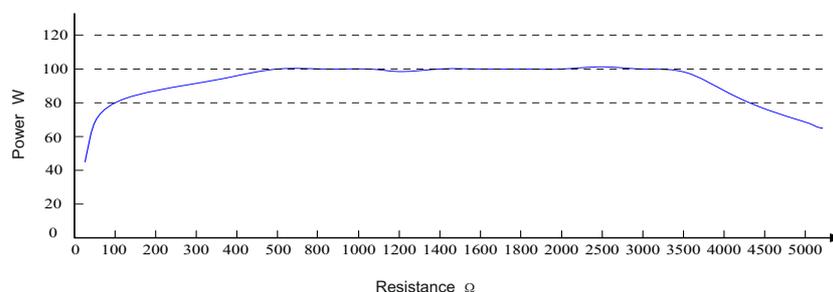

Automatic Bipolar Start/Stop with Alarm (Optional)

Under Bipolar Cut & Coag modes, user can choose Pedal Control Or AutoStart Control

Compatible with Other Equipments:

Argon Plasma Coagulation System
Optimum Smoke Evacuation System

Wireless Footswitch Facility (Optional)

Wireless 3 Pedal Footswitch For Monopolar & Bipolar Modes.

Application of Use

General Surgery; Gastroenterology; Dermatology;
Vascular Surgery; Obstetrics and Gynecology Heart/Thoracic Surgery; ORL/ENT
Minimally Invasive Surgery (MIS) Cerebral surgery Neurosurgery;
Orthopedics & Plastic Surgery, Trans Urethral Resection (TuR) and etc.

Technical Specification:

Operating Frequency : 480kHz
Power Supply: 100-240V / 50-60Hz

Weight and Dimension:

Weight: 5.00KG
Dimension: 380 x 305 x 115 mm

High Frequency Leakage:

Monopolar: < 150mA; Bipolar <60mA

Low Frequency Leakage:

Normal Polarity, Intact Chassis Ground: <10µA
Normal Polarity, Ground open < 50µA
Reverse Polarity, Ground Open < 50µA
Sink Current, 140V Applied, All inputs < 50µA

Technical Specification

Working Mode		Maximum P-P Voltage	Rated Load	Max. output power	Crest Factor (Typical)
Monopolar Cut	Low	1200	300Ω	300W	1.5
	Pure	1400	300Ω	300W	1.5
	Blend	2200	300Ω	200W	2.5
Monopolar Coag	Spray	6000	500Ω	120W	8.0
	Fulgurate	4900	500Ω	120W	7.0
	Dessicate	4000	500Ω	150W	4.0
Bipolar	Micro	300	100Ω	70W	1.5
	Macro	550	100Ω	70W	1.5